

### INTRODUCTION

The C62 Series is a 4/8 port 10/100/1000BaseT L2 Pro Managed PoE Switch capable of feeding 90W (54V max.per port) power to Power over Ethernet (PoE) devices. It comes with 2xGbE RJ45 + 2xGbE SFP port. The switch is capable of a total of 360/720 Watts power budget.

### PACKAGE CONTENTS


* 1x PoE switch	* 1x Quick Installation Guide
* 2x rack mount ears	* 1x power cord (type by the shipped-to area)

### ⚠ IMPORTANT:


1. Install the PoE switch in a ventilated and dry place that is free of electromagnetic source, vibration, moisture, and dust.
2. Make sure the ventilation openings on the switch are not blocked.
3. Use CAT5 or 5e UTP/STP cables.
4. C62-044-91-380 AC input (100~240V/AC, 50~60Hz, 4.7A)
5. C62-084-91-770 AC input (100~240V/AC, 50~60Hz, 9.2A)

### C62-044-91-380 CONNECTION

#### Front Panel

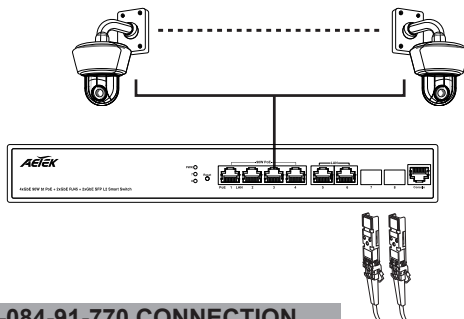


#### Rear Panel

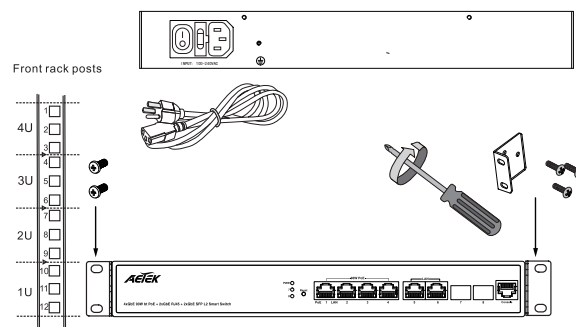


### C62-084-91-770 CONNECTION

#### Front Panel

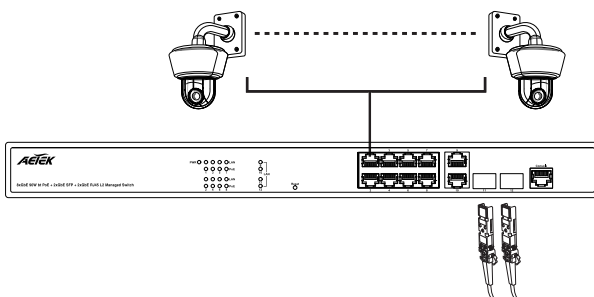

#### Rear Panel

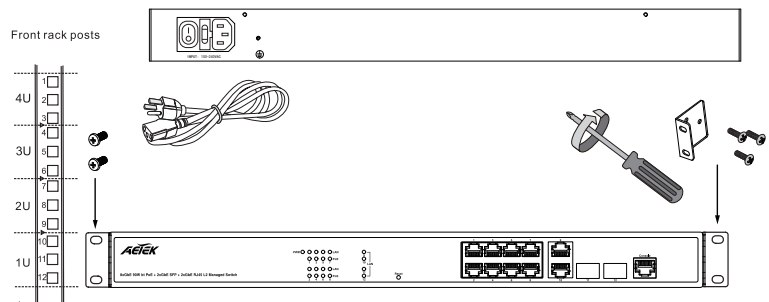

### DEFAULTS

IP Address	192.168.1.1
Subnet Mask	255.255.255.0
User name	admin
Password	admin

### Console Port Defaults

Baud rate	115200
Stop bits	1
Data bits	8
Parity	N
Flow control	none

### LED DEFINITIONS

<b>Power</b>	Green ON	The Power LED lights up when the switch is connected to a power source.
<b>LAN</b>	Green ON	Port is enabled and link established with a device at the 1000Mbps speed.
	Green Blinking	Port is transmitting and receiving data at the 1000Mbps speed.
	Amber ON	Port is enabled and link established with a device at the 100Mbps speed.
	Amber Blinking	Port is transmitting and receiving data at the 100Mbps speed.
<b>PoE</b>	Amber ON	Indicates the PoE powered device (PD) is connected and the port supplies power successfully.
	Amber Off	Indicates no powered device (PD) connected.

### Reset Button

Task	Press time	Port Status LED Behavior
Restart	2 ~ 7 seconds	All LEDs are OFF
Restore default	7 ~ 12 seconds	All LEDs stay ON